

RESIFA™ M.S.GEL™ FC-Series Product Information

Product Description

RESIFA™ M.S.GEL™ FC series is a synthetic spherical silica having low back pressure, good particle size distribution and good performance in flash chromatography applications. We have two types of FC series: high surface area and low surface area. M.S.GEL™ FC series is available in a variety of particle sizes.

Product Line Up

Product Family	15µm	20µm	25µm	60µm
High Surface Area				
Specific Surface Area = 700 m ² /g				
Pore Volume = 0.85 ml/g	FC-15(H)	FC-20(H)	FC-25(H)	FC-60
Pore Diameter = 5.0 nm				
Low Surface Area	15µm	20µm	25µm	60µm
Specific Surface Area = 450 m ² /g				
Pore Volume = 0.85 ml/g	FC-15(L)	FC-20(L)	FC-25(L)	-
Pore Diameter = 9.0 nm				

High Surface Area Type


		FC-15(H)	FC-20(H)	FC-25(H)	FC-60
Mean particle size	µm	15 ± 2.0	20 ± 2.0	25 ± 2.0	-
D10/D90	-	≤2.2	≤2.2	≤2.2	-
75 µm up	%	-	-	-	≤10.0
35 µm down	%	-	-	-	≤10.0
Specific surface area	m ² /g	700 ± 100	700 ± 100	700 ± 100	680 ± 50
Pore volume	mL/g	0.85 ± 0.15	0.85 ± 0.15	0.85 ± 0.15	0.90 ± 0.10
Pore diameter	nm	5.0 ± 2.0	5.0 ± 2.0	5.0 ± 2.0	5.4 ± 1.0
pH	-	6.5 ± 1.5	6.5 ± 1.5	6.5 ± 1.5	7.0 ± 1.0
Loss on drying	%	≤15.0	≤15.0	≤15.0	≤15.0

RESIFA™ M.S.GEL™ FC-Series Product Information

Low Surface Area Type

		FC-15(L)	FC-20(L)	FC-25(L)
Mean particle size	μm	15 ± 2.0	20 ± 2.0	25 ± 2.0
D10/D90	-	2.2	2.2	2.2
Specific surface area	m ² /g	450 ± 100	450 ± 100	450 ± 100
Pore volume	mL/g	0.85 ± 0.15	0.85 ± 0.15	0.85 ± 0.15
Pore diameter	nm	9.0 ± 3.0	9.0 ± 3.0	9.0 ± 3.0
pH	-	6.5 ± 1.5	6.5 ± 1.5	6.5 ± 1.5
Loss on drying	%	≤15.0	≤15.0	≤15.0

M.S.GEL™ FC-25 Particle Structure

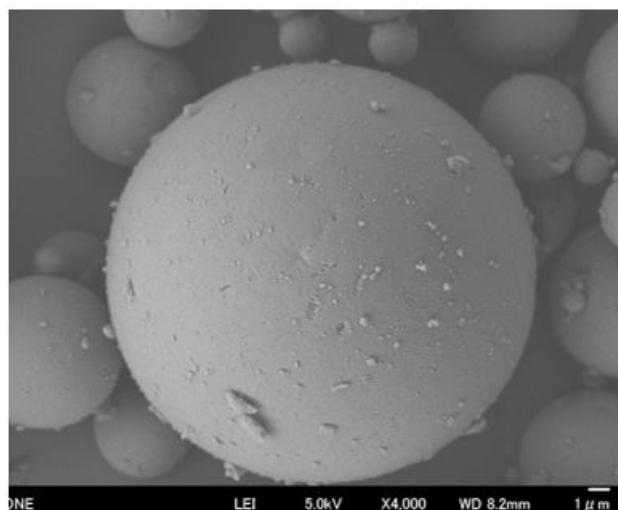

Photograph of FC-25

Additional Information

Packaging

M.S.GEL™ products are packaged in a plastic bottle or carton, double-lined with a polyethylene bag.



RESIFA™ M.S.GEL™ FC-Series Product Information

Storage and Shelf Life

M.S.GEL™ silica have a shelf life of >2 years from the date of manufacture when stored in the original, unopened package between 10 and 40 °C.

Safety and Handling

A Safety Data Sheet for this product can be obtained from your local AGC representative. Before handling, it is recommended to review the Safety Data Sheet for handling, safety and health information.

Product Specifications

Additional product specifications and information can be obtained by request.

RESIFA™ and M.S.GEL™ are registered trademarks of AGC Inc.

**AGC Chemicals Company
AGC Inc.**

Shin-Marunouchi Bldg.
1-5-1 Marunouchi
Chiyoda-ku, Tokyo
100-8405 Japan
Tel: +81-3-3218-5438
www.agc-chemicals.com

AGC Asia Pacific Pte., Ltd.

460 Alexandra Road
#32-01 mTower
Singapore 119963
Tel: +65 6273 5656
www.agc-asiapacific.com

**AGC Chemicals Trading
(Shanghai) Inc.**

Room 4008/09, F40, T1
Raffles City Changning
No.1133 Changning Road
Shanghai, China 200051
Tel: +86-21-6386-2211
www.agcsh.com

AGC Chemicals Europe, Ltd.

Hillhouse International
Fleetwood Road North
Thornton-Cleveleys
FY5 4QD
United Kingdom
Tel: +44 (0) 1253 209560
www.agcce.com

**AGC Chemicals Europe, Ltd.
Commercial Centre**

World Trade Center, Zuidplein 80
1077 XV Amsterdam, Netherlands
Tel: +31-(0)-20-880-41-70
www.agcce.com

AGC Vidros do Brasil Ltda.

Estrada Municipal Doutor Jaime
Eduardo Ribeiro Pereira, 500
Jardim Vista Alegre
Guaratinguetá, SP, Brasil
CEP 12523-671
Tel: +55 12 3127-7100
www.agcchem.com/pt-br/



**Chemistry
for a Blue Planet**
AGC Chemicals

**AGC Chemicals
(Thailand) Co., Ltd.**

944 Mitrtown Office Tower, 14th Floor
Rama 4 Road, Wangmai Sub-District
Pathumwan District, Bangkok 10330
Thailand
Tel: +66-2-092-6499
www.acth.co.th

AGC

AGC Chemicals Americas, Inc.

55 E. Uwchlan Avenue, Suite 201
Exton, PA 19341
United States of America

Telephone: +1 610-423-4300
Toll Free (US only): 800-424-7833
Fax: +1 610-423-4305

www.agcchem.com

Visit our website for compliance information and industry certifications.

The information provided herein is related only to the specific product designated and may not be applicable where such product is used in combination with any other materials or in any process.

NO REPRESENTATION OR WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OF ANY OTHER NATURE, ARE MADE HEREUNDER.

The user of this product has the sole responsibility to determine the suitability of the product for any use and manner of use intended. This document may be revised after its issuance, and the user is advised to use the latest revision.

This information should be used as a guide only and not to establish specification limits or design criteria.